

Demonstration of swirl-controlled 3D-printed mesoscale burner array using gaseous HCs

Conor Martin¹, Rita Groetz¹, Jihyung Yoo¹, Rajivasanth Rajasegar², Tonghun Lee²

¹University at Buffalo, Department of Mechanical and Aerospace Engineering; Micro & Mesoscale Combustion Lab (MIMC)

²University of Illinois Urbana Champaign, Department of Mechanical Science and Engineering



Introduction

- Small length scale flames, microscale (~mm) and mesoscale (~cm), have potential for applications to power small scale devices
- Potential replacement for batteries in certain applications to **increase efficiency**
- Small scale flames are driven by different fluid physics and flame chemistry than flames on the macroscale
- Extinction modes and flame instabilities become much more prevalent on the small scale and are currently poorly understood
- Swirl flow enhances flame stability via creation of an internal recirculation zone

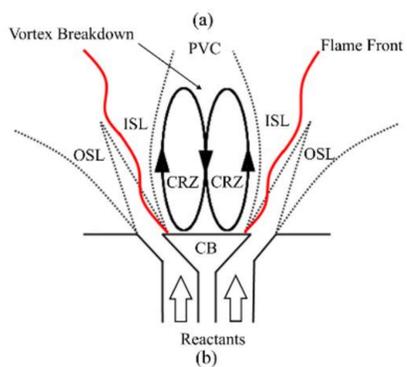


Figure 1: (a) Pictures of flame stabilized 4x4 mesoscale burner array operating with methane air mixture in partially premixed configuration (b) Flow field for a swirl stabilized flame; CB – center body, OSL – Outer shear layer, ISL – Inner shear layer, CRZ – Center Recirculation Zone, ORZ – Outer Recirculation Zone, PVC – Precessing Vortex Core

Experimental Methods

- 4x4 mesoscale burner array was designed through several iterative variations and 3D printed to study mesoscale flames
- The effectiveness of swirl flow was evaluated for both partially and fully premixed methane-air flames via a measure of flame temperature

Test Conditions

- 10 - 20k scc/min total flow (MFCs)
- $0.5 \leq \text{Equivalence Ratio } (\phi) \leq 2$
- 0 - 80% of total flow from swirl

Burner Array Design

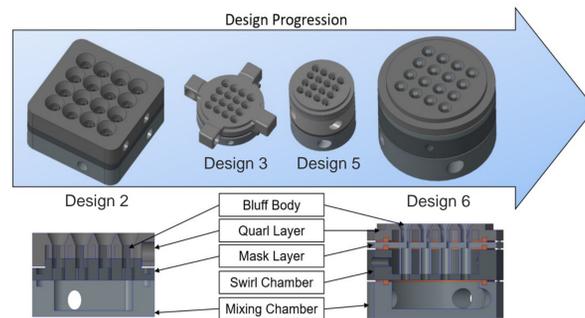


Figure 2: Design iterations highlighting layered structure and internal geometries of Design 2 and Design 6

- The design sought to improve:
 1. Independent swirl flow control
 2. Uniform flame structure
 3. Range of test conditions (flow rates, ϕ)
- The final prototype employed the best of these optimized features for the design goals
- Additive manufacturing techniques were employed to rapidly iterate through designs

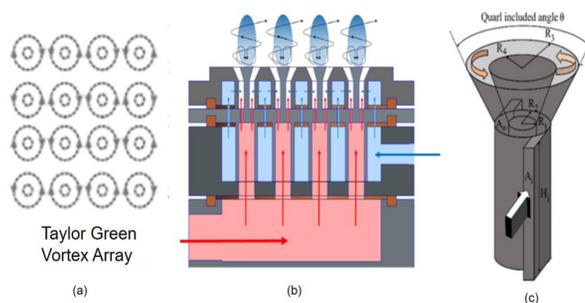


Figure 3: (a) 4x4 Taylor Green vortex arrangement. (b) Cross sectional view of the burner array design (c) Individual burner array element schematic.

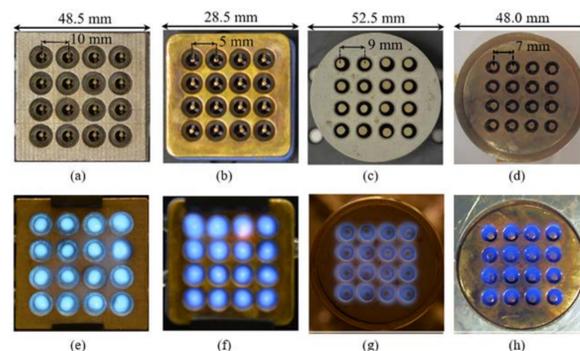


Figure 4: Images of (a through d) various mesoscale burner array designs, D2 through D6. (e through h) Images of same burners operating with methane-air mixture in premixed configuration

Results

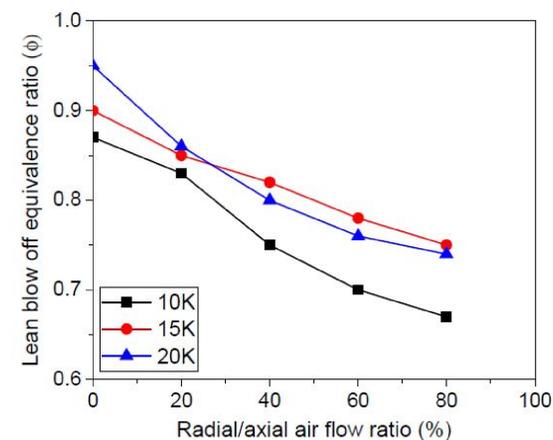


Figure 5: Flame stability limits as a function of the radial/axial flow rate for mesoscale burner array operating in swirl stabilized mode

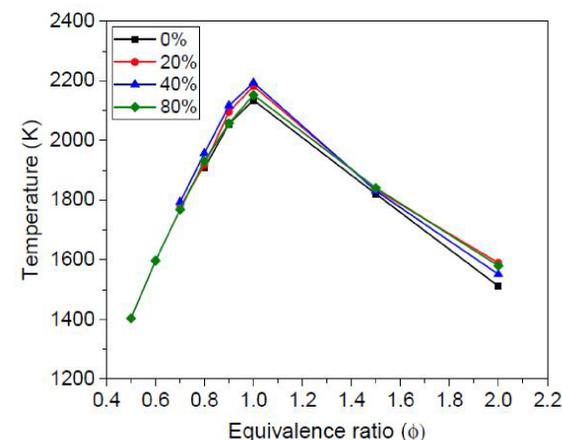


Figure 6: Flame temperature measurements as a function of equivalence ratio for various levels of radial/axial flow ratios

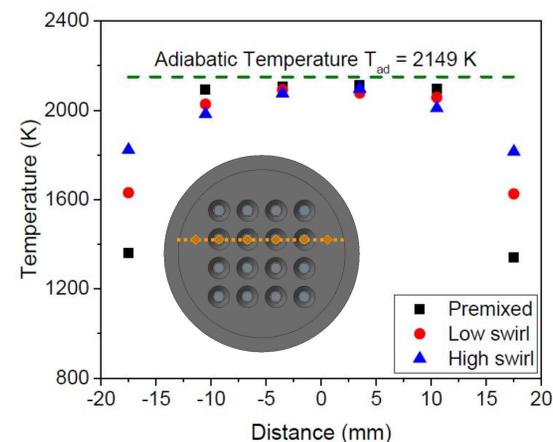


Figure 7: Spatial temperature distribution at 25mm above the burner array surface under various swirl stabilized configurations ($\phi = 0.95$ and total flow rate of 10k scc/min)

Conclusion

- Swirl flow was shown to be a viable method of improving flammability limits of small scale flames
- Swirl flow has no significant effect on basic chemistry of a reaction and allows partially premixed flames to be modeled as fully premixed in this configuration
- Interactions between burner elements provides further stabilizing mechanism via inter-element reheating
- Successfully adapted 3D printing to mesoscale burner that produces stabilized mesoscale flames

Acknowledgements

- The authors gratefully recognize the support of the Air Force Office of Scientific Research under Grant FA9550-14-1-0343 with Dr. Chiping Li as Technical Monitor
- CURCA who provided funding for this project
- UB honors college who provided funding through the Research and Creativity fund

References

- [1] Martin, C., Groetz, R., Yoo, J., Rajasegar, R., & Lee, T. "Demonstration of swirl-controlled 3D-printed mesoscale burner array using gaseous hydrocarbon fuels." *55th AIAA Aerospace Sciences Meeting*. 2017.
- [2] Ju, Y., and Maruta, K. "Microscale combustion: technology development and fundamental research," *Progress in Energy and Combustion Science* Vol. 37, No. 6, 2011, pp. 669-715.
- [3] Kyritsis, D. C., Roychoudhury, S., McEnally, C. S., Pfefferle, L. D. & Gomez, A. Mesoscale combustion: a first step towards liquid fueled batteries. *Experimental Thermal and Fluid Science* **28**, 763-770, (2004).
- [4] Gupta, A. K., Lilley, D. G. & Syred, N. *Swirl flows*. (Abacus Press, 1984).
- [5] Driscoll, J. F., and Temme, J. "Role of swirl in flame stabilization," *49th AIAA Aerospace Sciences Meeting including the New Horizons Forum and Aerospace Exposition, AIAA*. Vol. 108, 2011, pp. 1-11.
- [6] Lee, S. *Development of mesoscale burner arrays for gas turbine reheat*, Ph. D. Dissertation, Department of Mechanical Engineering, Stanford University, Stanford, CA, 1995.

Contact

Conor Martin: conormar@buffalo.edu
 Dr. Jihyung Yoo: jihyungy@buffalo.edu
<http://rapid.eng.buffalo.edu/>